



BACK
BOX


FRONT VIEW

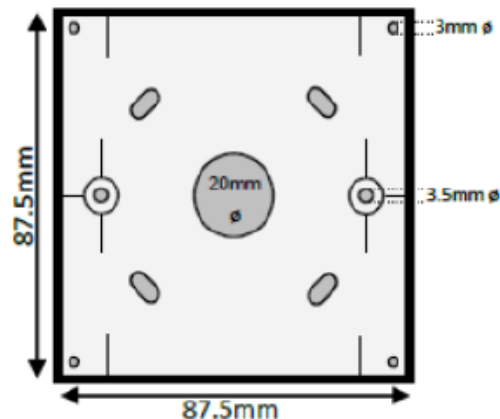

REAR VIEW

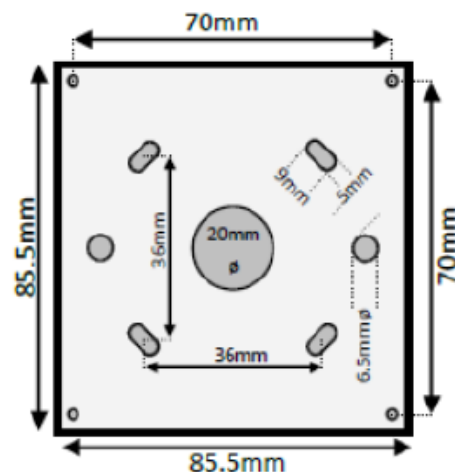

SIDE VIEW

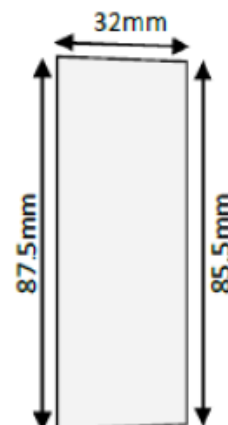

DESCRIPTION


Surface call point

POLES

Single, Double, Triple, Quadruple

Common, N/O, N/C wiring on each pole as below

Diagram shows call point in set, untriggered position



ACTIVATION

Microswitch/resettable plate

Microswitch/"Like glass" insert

Microswitch/Real glass insert

Key provided

WATERPROOFING

None

LED

None

TEMPERATURE RANGE




-40 to +85 degrees Celsius

ELECTRICALLY RATED AS FOLLOWS

50 Volts DC/5A

250 Volts AC/3A

CALL POINT
FRONT

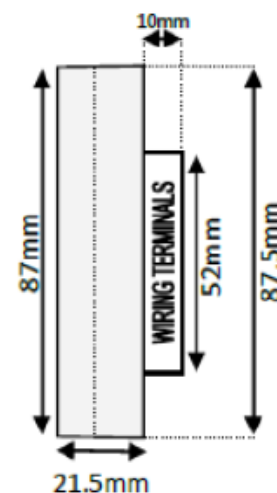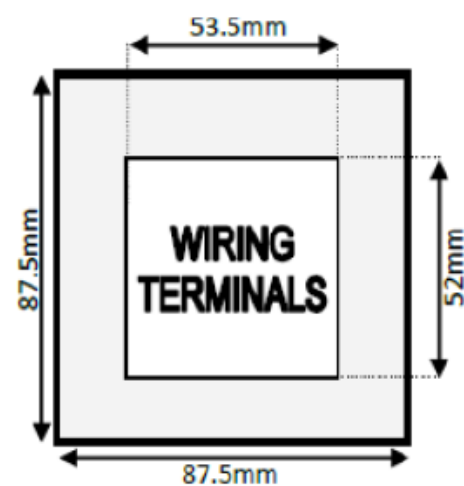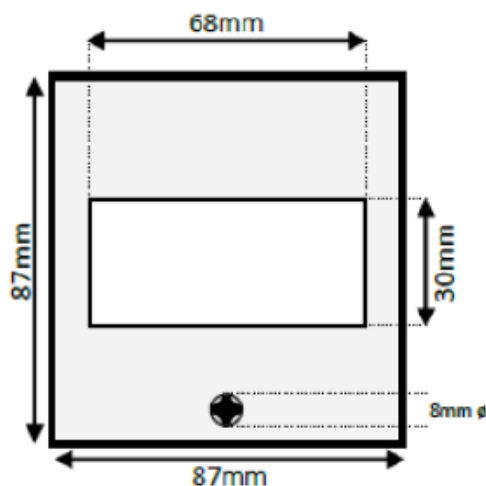

NERIVAL

Toimivia Ratkaisuja jo 20 Vuotta

PL 31

02361 Espoo

Puh. 09-813 4571

Fax. 09-802 1386

Drawing #: MG & KG

Drawn: T.T

Date: 01/05/2016

Revision: 2

All dimensions in mm

Do not scale

