



Tekniset tiedot

Toiminto	Jännitteellisenä auki/kiinni valittavissa
Asennus	Uppoasennus
Mitat	210 x 25 x 51.9 mm
Rintalevy	Vakio 150 x 30 x 1.5 mm
Telki	26.3 x 16.5 x 12.95 mm
Käyttöjännite	12-24 VDC/VAC
Virta	≤ 300mA
Pitovoima	450kg (1000lbs)
Releulostulo	NC/NO/COM
Käyttölämpötila	-20°C - 50°C
Paino	0.8kg

Mitat (mm)

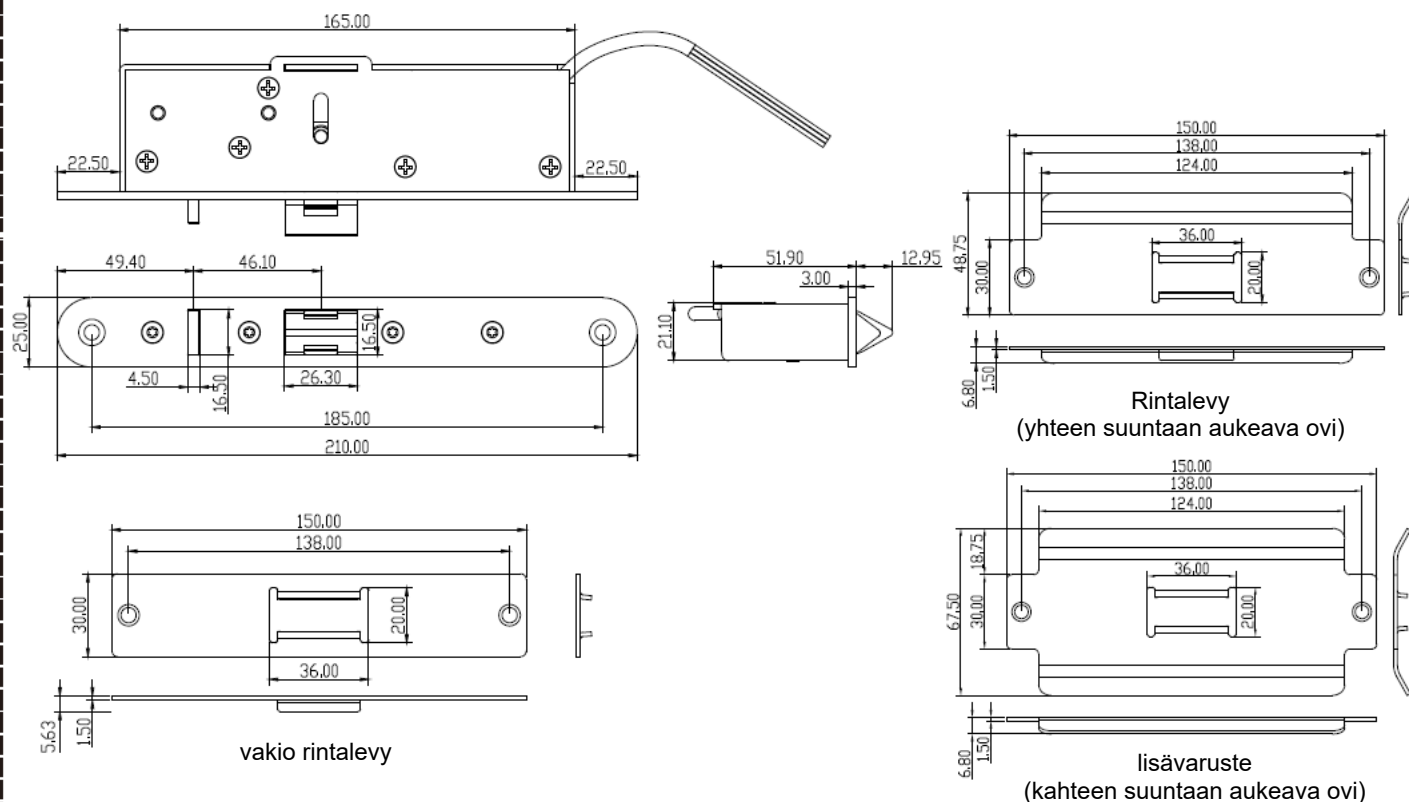



Installation

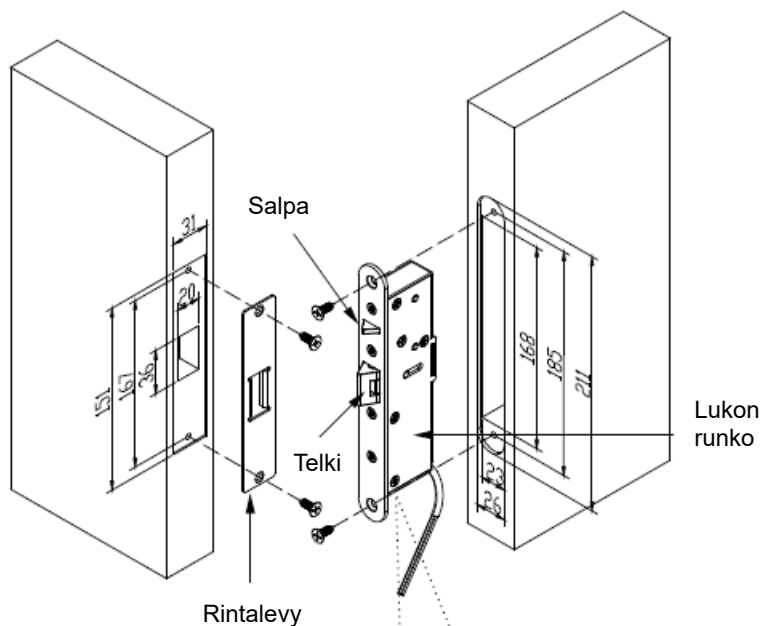

Asennus yläkarmiin

Toimintotilan valinta

Irroita ruuvi 1 irti samalla löysentäen ruuvia 2.
Liuta ruuvi 2 paikoilleen ja kiristä.

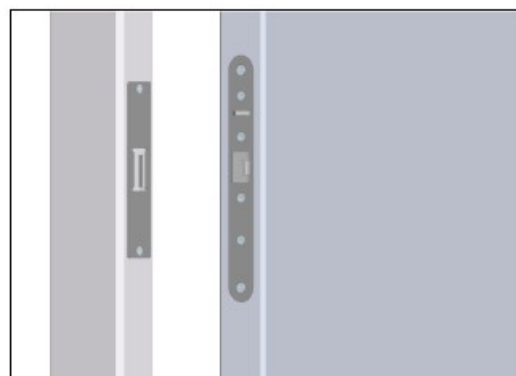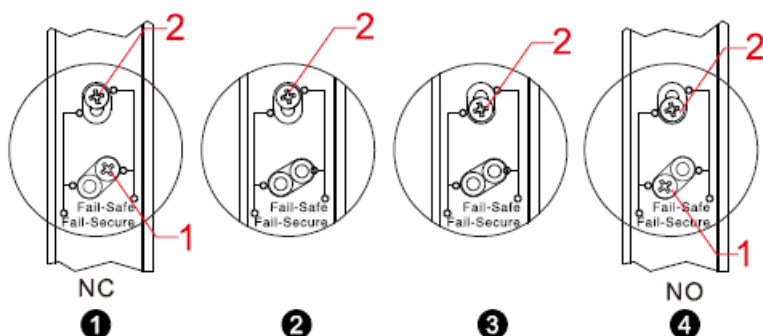

Asennus sivukarmiin



HUOM!

Löysennä ruuvia 2 varovasti. Älä irroita!
Lukko putoaa muuten pois paikoiltaan.


Kytkeä

	Punainen		+
	Musta		-
	Keltainen		NC
	Valkoinen		COM
	Vihreä		NO


Features

Function	Fail safe/Fail secure (adjustable)
Installation	Flush mounting
Dimensions	210 x 25 x 51.9 mm
Face plate	Standard 150 x 30 x 1.5 mm
Bolt	26.3 x 16.5 x 12.95 mm
Operating voltage	12-24 VDC/VAC
Current	≤ 300mA
Holding force	450kg (1000lbs)
Relay output	NC/NO/COM
Operating temperature	-20°C - 50°C
Weight	0.8kg


Dimensions (mm)

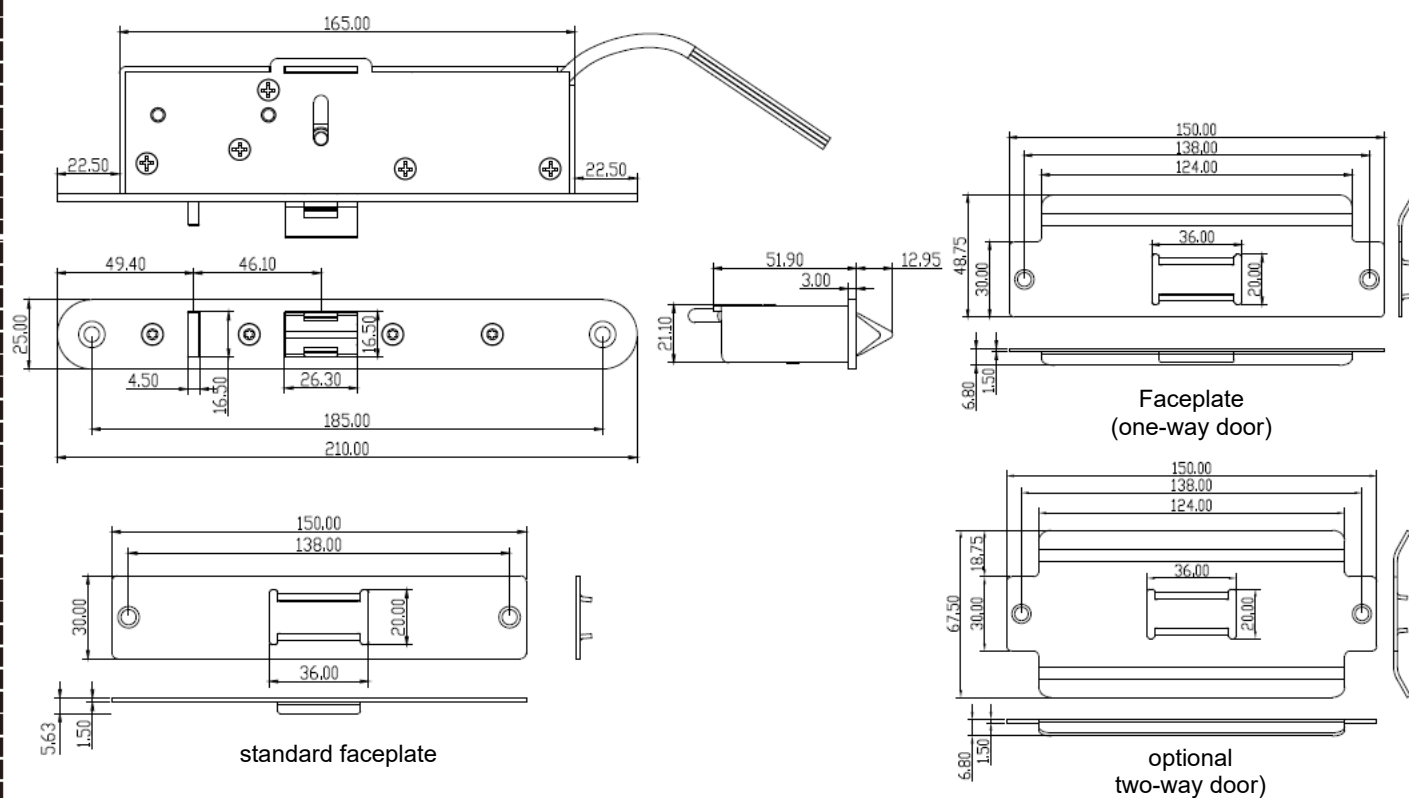

Installation

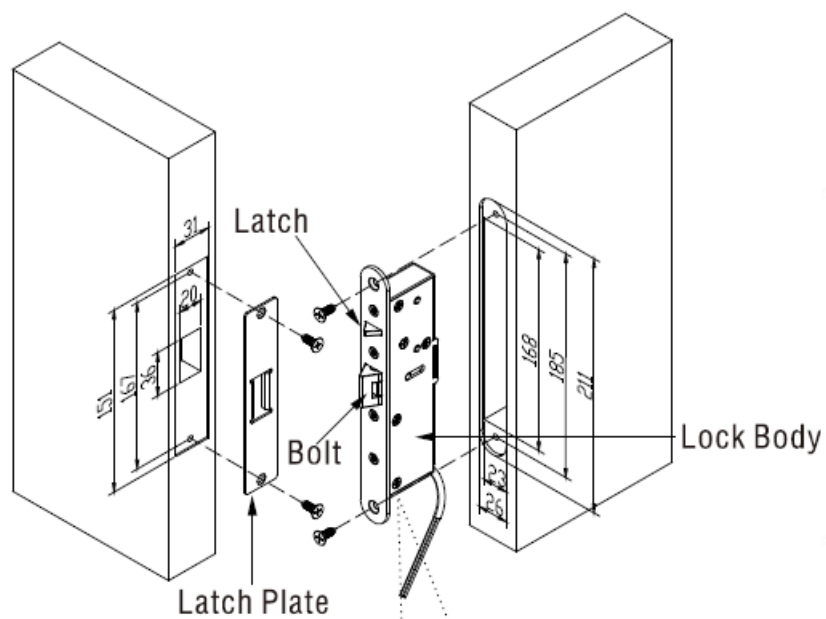

Installation on top

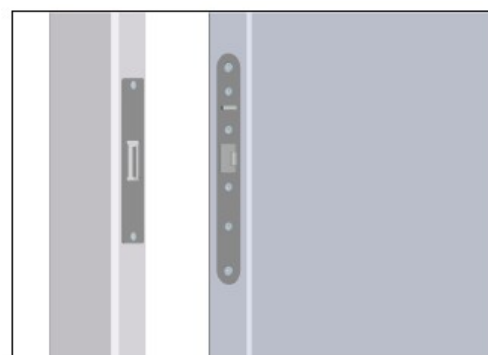


Side installation

Mode Switching

Pic 2: Unscrew 1 while loosen 2; Pic 3: sliding move screw 2

Pic: Tighten screw 1, 2, process finished

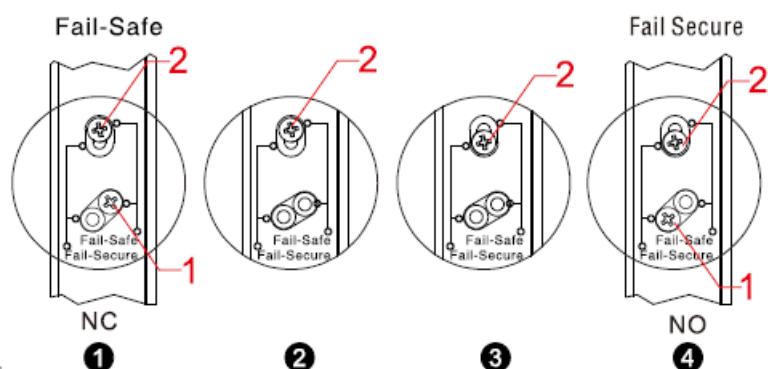

Tips:

Please loosen Screw 2 and move it slightly, do not take it out, or else it will make magnetic valve drop out of lock body.

Wiring

	Red		+	
	Black		-	
	Yellow		NC	} Look Status Signal Output
	White		COM	
	Green		NO	