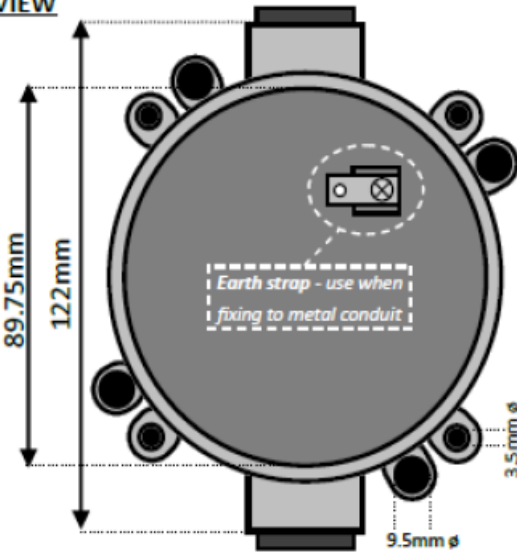
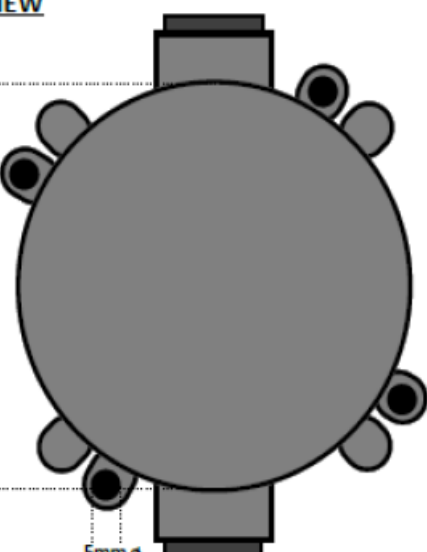

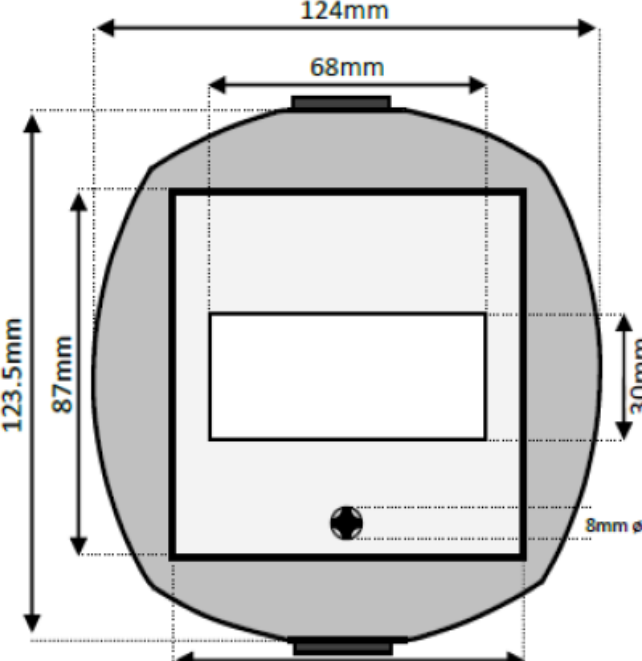
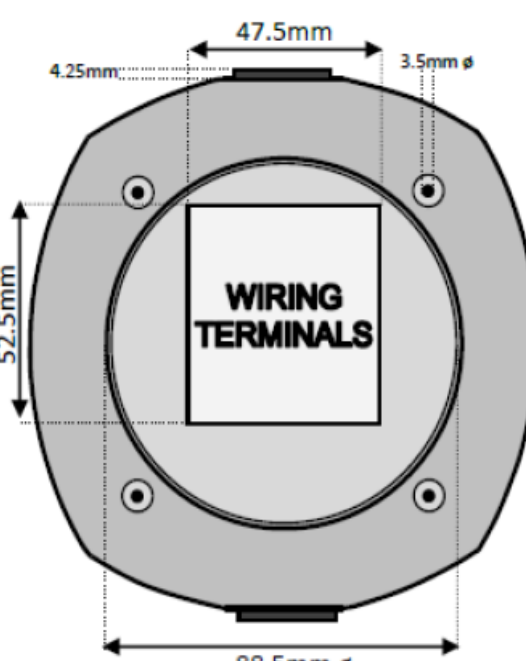
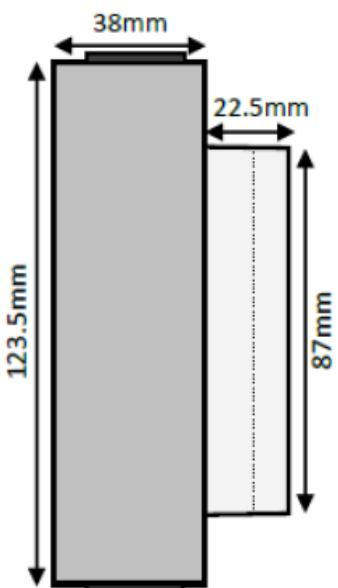


BACK BOX	FRONT VIEW 	REAR VIEW 	SIDE VIEW 	DESCRIPTION Weatherproof Surface call point POLES Single, Double, Triple, Quadruple Common, N/O, N/C wiring on pole as below <i>Diagram shows call point in set, untriggered position</i>  ACTIVATION Microswitch/resetttable plate Microswitch/"Like glass" insert Microswitch/Real glass insert Key provided
	CALL POINT FRONT 			WATERPROOFING Twin O ring sealed cable entry Waterproof activation microswitch Large O ring seal between back box & front IP67 rated LED Optional TEMPERATURE RANGE -40 to +85 degrees Celsius ELECTRICALLY RATED AS FOLLOWS 50 Volts DC/5A 250 Volts AC/3A

NERIVAL

Toimivia Ratkaisuja jo 20 Vuotta

PL 31
02361 Espoo
Puh. 09-813 4571
Fax. 09-802 1386

Drawing #: W/PROOF MG
Drawn: T.T
Date: 01/02/2017
Revision: 1

All dimensions in mm
Do not scale



NOTES REGARDING PART CODES:

The waterproof MG can be produced to various specifications. Specifications are available on demand.



CALL POINT FRONT



CALL POINT REAR

NOTE: TRIPLE POLE VARIANT SHOWN



CALL POINT BACK BOX

NERIVAL

Toimivia Ratkaisuja jo 20 Vuotta

PL 31
02361 Espoo
Puh. 09-813 4571
Fax. 09-802 1386

Drawing #: W/PROOF MG
Drawn: T.T
Date: 01/02/2017
Revision: 1

All dimensions in mm
Do not scale

